


Trimod[®]Besta

Trimod Besta Füllstandschalter

Trimod Besta Level Switch

Trimod Besta Contrôleur de niveau

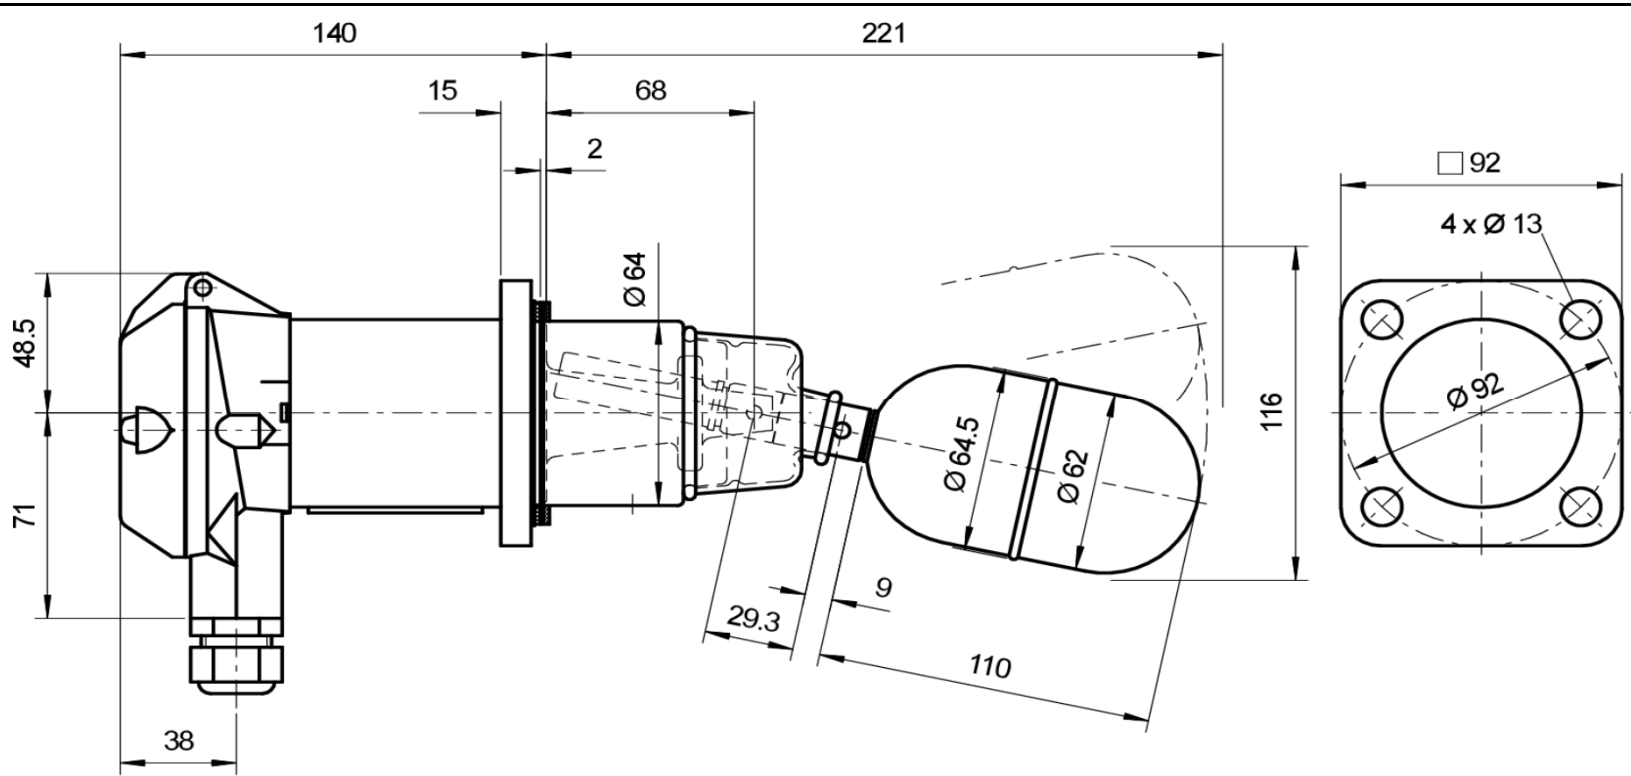

Code 10: *) Navy Equipment (DIN 89280) type of fitting "W" for unscreened cable,
cable gland for cable Ø6...13 mm

Gasket Ø77/64x2 Blue Gard 3000

Type	Schaltmodul	Flanschmodul	Schwimmermodul
Type	Switch module	Flange module	Float module
Type	Module de commande	Module de bride	Module de flotteur
Betriebstemperatur	Gehäusematerial	Nenndruck / -weite	Schaltdifferenz
Operating temp.	Housing material	Nom. Pressure / -Diameter	Operating diff.
Temp. de service	Matériau boîtier	Pression- / Section Nominal	Différentiel
Umgebungstemp.	Kabeleinführung	Norm	Dichte min.
Ambient temp.	Cable entry	Standard	Density min.
Temp. d'ambiance	Presse-étoupe	Norme	Densité min.
Schaltleistung	Schutzart	Dichtungsart	Prüfdruck
Switch rating	Enclosure	Flange Facing	Test pressure
Pouvoir de coupure	Cl. de protection	Type d'étanchéité	Pression d'épreuve

Safety Integrity Level:	SIL 1 (SIL 3 Capable)
Dimensionen / Dimensions	mm
Überwurfflansch	--
Slip-on flange	--
Bride folle	--
Schmelze / Heat no:	--
Bachofen-Nr. / Bachofen no:	--
Fixflansch	1.4408
Fixed flange	1.4408
Bride fixe	1.4408
Schmelze / Heat no:	--
Bachofen-Nr. / Bachofen no:	--
Schwimmer / Balg	1.4571
Float / Bellow	1.4571
Flotteur / Soufflet	Perbunan
Order no.	--
Stk./ pcs./quant.	--
Date/Visa	23.05.16 / TSI

BACHOFEN
Industrial Automation

Bachofen AG, Ackerstrasse 42
CH-8610 Uster/Switzerland
Phone +41 44 944 11 11
Fax +41 44 944 12 33
info@trimodbesta.com
www.trimodbesta.com

011015/TSI