




TriMod BESTA Niveauschalter
TriMod BESTA level switch
Contrôleur de niveau TriMod BESTA

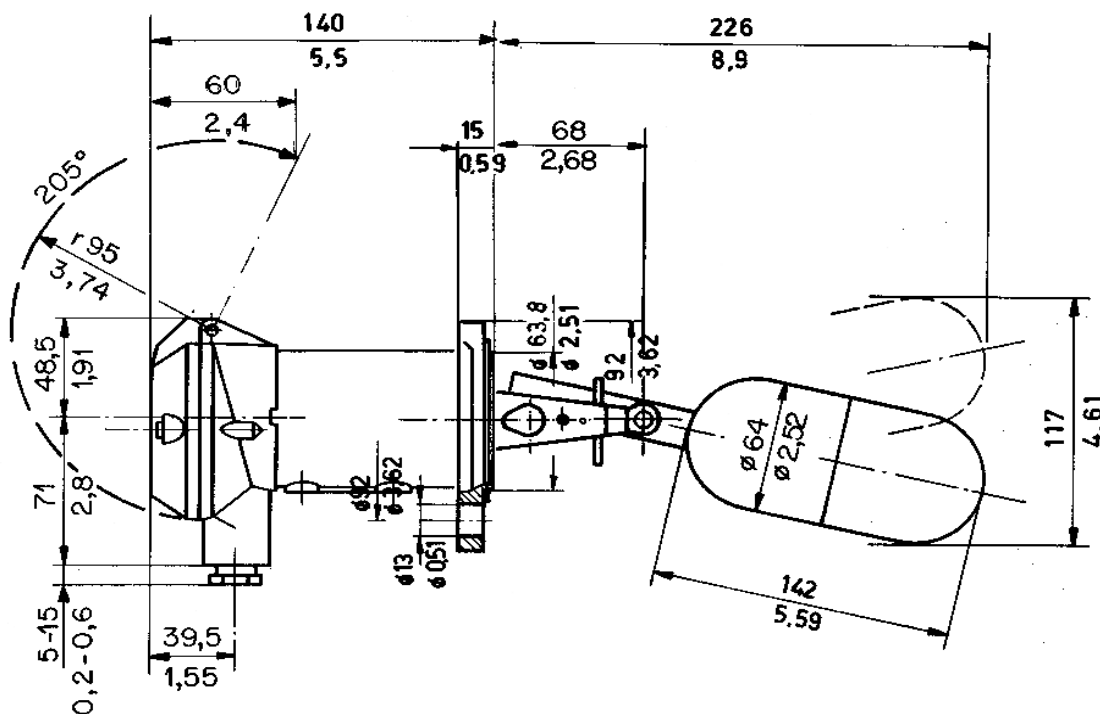

Dimensionen / Dimensions [mm]	
D	d4/g
b	
k	
d2/l	
Anz./no:	4
Überwurfflansch Composite flange Bride folle	
Schmelze /Heat no:	
B-Nr:	
Fixflansch Fixed flange Bride fixe	1.4408
Schmelze /Heat no:	
B-Nr:	
Schwimmer Float Flotteur	1.4571
Schmelze /Heat no:	
B-Nr:	
Order no.	
Stk. / pcs./quant.	
Date/Visa	06.11.2001/AE

Type Type 10A 01 041 Type	Schaltmodul switch module 10A Mod. de commande	Flanschmodul flange modul 01 Module de bride	Schwimmermodul float module 041 Module de flotteur	Order no.	
				Stk./ pcs./quant.	
				Date/Visa	06.11.2001/AE
Betriebstemperatur Operating temp. 0 to 300 °C Temp. de service	Gehäusematerial Housing material Aluminium Matériau boîtier	Druck / Nennweite Pressure / Bore 25 Pression / Diamètre	Schaltdifferenz Operating diff. 12 mm Différentiel	BESTA AG Ackerstrasse 45 CH - 8610 Uster / Switzerland Phone +41 43 399 15 15 Fax +41 43 399 15 00 Email info@besta.ch Internet www.besta.ch 010400/PH	
Umgebungstemp. Ambient temp. 0 to 70 °C Temp. d'ambiance	Kabeleinführung Cable entry DIN 89280 M24x1.5 Presse-étoupe	Norm Standard BESTA Norme	Dichte min. Density min. 0.7 kg/dm3 Densité min.		
Schaltleistung Switch rating 5 A / 250 VAC Pouvoir de coupure 5 A / 30 VDC	Schutzart Enclosure IP 65 Cl. de protection	Dichtungsart Flange Facing Form C Type d'étanch.	Prüfdruck Test pressure 40 bar Press. d'épreuve		