

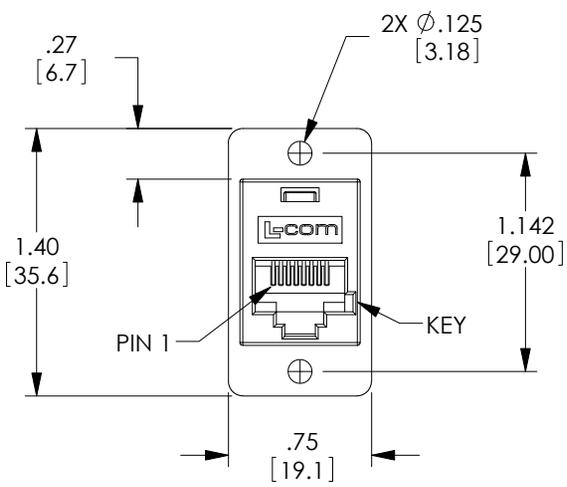


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 5720: REVISED GOLD PLATE TO 30u, ALL NOTES, NEW FORMAT	9/20/11	D.FRISIELLO
F	ECN 6114: CN RELEASE	5/31/12	D.FRISIELLO
G	ECN 6554: REVISED DIM TO [1.4], ROHS, FORMAT, REMOVE FINISH, MAT'L PC TO ABS	2/12/14	D.FRISIELLO
H	ECN 8260: REMOVED L-COM LOGO FROM REAR HOUSING	2/18/16	D.FRISIELLO

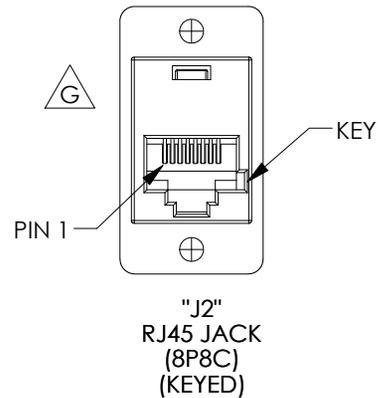


"J1"  
RJ45 JACK  
(8P8C)  
(KEYED)

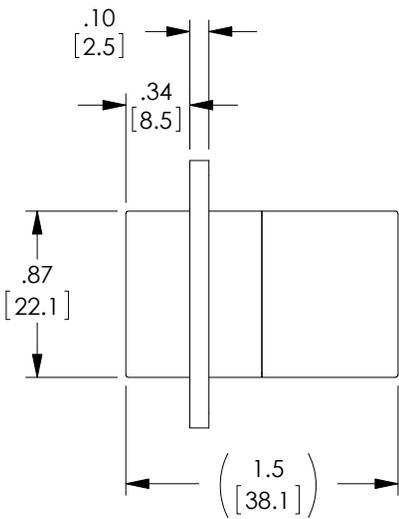

"J2"  
RJ45 JACK  
(8P8C)  
(KEYED)

"J1"	"J2"
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

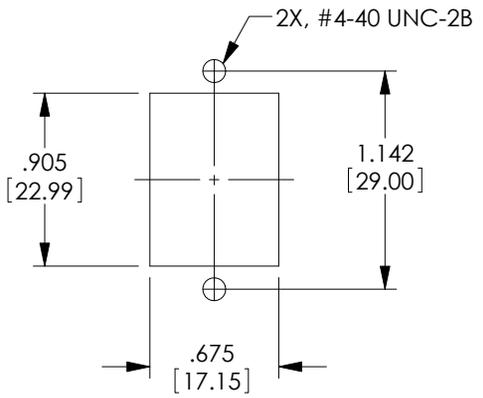

RECOMMENDED  
PANEL CUTOUT

**NOTES:**

**MATERIAL:**

HOUSING: ABS, UL94V-0, COLOR: BLACK  
CONTACTS: PHOSPHOR BRONZE  
CONTACT PLATING: GOLD, 30 μ INCHES OVER NICKEL PLATING.

**ELECTRICAL:**

CURRENT RATING: 2 AMPS (MAX.)  
VOLTAGE RATING: 140 VDC

**MISCELLANEOUS:**

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.  
OPERATING TEMPERATURE RANGE: -20 °C TO +80 °C.  
RATING APPLICATION: CATEGORY 3

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**

CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	4/23/12		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.DESJARDIN	4/23/12	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY D.GALLAGHER	4/23/12	CPLR PNL MNT 8X8K STRAIGHT BLK	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. ECF504B-8SK	REV. <b>H</b>
			SCALE: NONE	CAD FILE: ECF504B-8SK.SLDDRW
				SHEET 1 OF 1