



Nanostar Technologies

PRODUCT CATALOG



Quality Care is only Fair

Nanostar Technologies

16/172B Samychetty Palayam Road, Vannankoil, Coimbatore-641047.



+91-82200 07233, +91-9787979133



+91-82200 07233



sales@nanostartechnologies.com

www.nanostartechnologies.com



Nanostar Technologies

NANOSTAR TECHNOLOGIES



NID12-2NO



NIDC1255-2PO



NIDC0875-1PO



NID6.5-1PO



NID08-1PO



INDUCTIVE PROXIMITY SENSOR

info@companyname.com

Selection Guide



Nanostar Technologies

XX X X XX XX - XX X X

1 & 2 DIGIT : VERSION

Nanostar Inductive Sensor	NI
---------------------------	----

3 DIGIT : POWER SUPPLY

DC	D
AC	A

4 DIGIT : TYPE

Connector	C
Wire	-
Box Type	B

5 & 6 DIGIT : DIAMETER OF TUBE

Tubular M6.5	6.5
Tubular M08	08
Tubular M12	12
Tubular M18	18
Tubular M30	30
Box Type(40x28x12)	40

7 & 8 DIGIT : LENGTH OF TUBE

45mm	45
55mm	55
60mm	60
65mm	65
70mm	70
75mm	75
80mm	80

12 DIGIT : OUTPUT TYPE

N/O	O
N/C	C

11 DIGIT : OUTPUT LOGIC

PNP	P
NPN	N
2 wire	D

9 & 10 DIGIT : SENSING DISTANCE

1mm	1
2mm	2
4mm	4
5mm	5
8mm	8
10mm	10
15mm	15

Inductive Proximity Sensor




Nanostar Technologies




FEATURES

- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL		
	PNP,NO	NID6.5-1PO
	NPN,NO	NID6.5-1NO
Dimensions: mm		
Operating Distance(Sn)	1mm	
External Diameter	M6.5 x 1	
Power Supply	10-30VDC	
Maximum Switching Current	300mA	
Power Drain	<15mA	
Voltage Drop(Sensor ON)	<2.2V	
Short Circuit Protection	No	
Operating Frequency	1kHz	
Repeatability(%Sn)	<3%	
Hysteresis(%Sn)	<10%	
Case	Nickel-Plated Brass	
Protection Degree	IP 67	
Operating Temperature	-25 to +70°C	
Output Connection	Cable PVC: L=2m	

CONNECTION DIAGRAM



PNP NO



NPN NO



+91-82200 07233, +91-9787979133



+91-82200 07233



sales@nanostartechnologies.com

Inductive Proximity Sensor

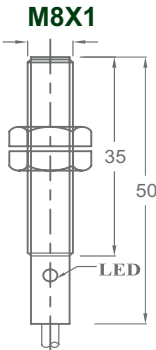
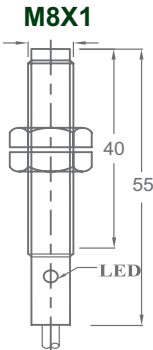
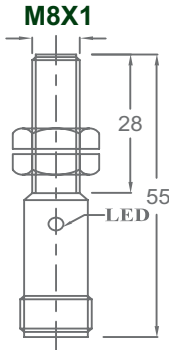
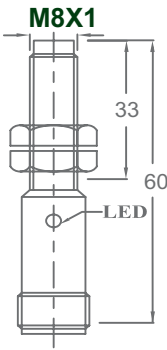


Nanostar Technologies




FEATURES


- ★ Short Circuit & Reverse Polarity Protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL					
	PNP,NO	NID08-1PO	NID08-2PO	NIDC0855-1PO	NIDC0860-2PO
	PNP,NC	NID08-1PC	NID08-2PC	NIDC0855-1PC	NIDC0860-2PC
	NPN,NO	NID08-1NO	NID08-2NO	NIDC0855-1NO	NIDC0860-2NO
	NPN,NC	NID08-1NC	NID08-2NC	NIDC0855-1NC	NIDC0860-2NC
Dimensions: mm					
Operating Distance(Sn)	1mm	2mm	1mm	2mm	
External Diameter	M8 x 1				
Power Supply	10-30VDC				
Maximum Switching Current	300mA				
Power Drain	<15mA				
Voltage Drop(Sensor ON)	<2.2V				
Short Circuit Protection	Yes				
Operating Frequency	1kHz				
Repeatability(%Sn)	<3%				
Hysteresis(%Sn)	<10%				
Case	Nickel-Plated Brass				
Flush Mounting	Yes	No	Yes	No	
Protection Degree	IP 67				
Operating Temperature	-25 to +70°C				
Output Connection	Cable PVC: L=2m			Connector	


CONNECTION DIAGRAM




PNP NO



NPN NO



PNP NC



NPN NC

CONNECTOR

M12 Male Connector



1 = Brown (+10 to 30V)

2 = Not used

3 = Blue (GND)

4 = Black (OUTPUT)

Inductive Proximity Sensor







Nanostar Technologies

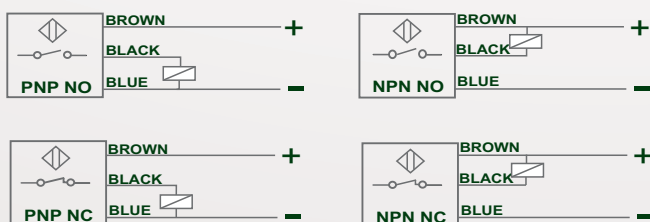


FEATURES

- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL					
	PNP,NO	NID12-2PO	NID12-4PO	NIDC1255-2PO	NIDC1260-4PO
	PNP,NC	NID12-2PC	NID12-4PC	NIDC1255-2PC	NIDC1260-4PC
	NPN,NO	NID12-2NO	NID12-4NO	NIDC1255-2NO	NIDC1260-4NO
	NPN,NC	NID12-2NC	NID12-4NC	NIDC1255-2NC	NIDC1260-4NC
Dimensions: mm					
Operating Distance(Sn)	2mm		4mm		4mm
External Diameter	M12 x 1				
Power Supply	10-30VDC				
Maximum Switching Current	300mA				
Power Drain	<15mA				
Voltage Drop(Sensor ON)	<2.2V				
Short Circuit Protection	Yes				
Operating Frequency	1kHz				
Repeatability(%Sn)	<3%				
Hysteresis(%Sn)	<10%				
Case	Nickel-Plated Brass				
Flush Mounting	Yes	No	Yes	No	
Protection Degree	IP 67				
Operating Temperature	-25 to +70°C				
Output Connection	Cable PVC: L=2m			Connector	

CONNECTION DIAGRAM



CONNECTOR

M12 Male Connector



- 1 = Brown (+10 to 30V)
- 2 = Not used
- 3 = Blue (GND)
- 4 = Black (OUTPUT)

Inductive Proximity Sensor



Nanostar Technologies







Nanostar Technologies



FEATURES

- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL				
 PNP,NO	NIDC0875-1PO	NIDC1265-2PO	NIDC1870-5PO	NIDC1880-8PO
Dimensions: mm				
Operating Distance(Sn)	1mm	2mm	5mm	8mm
External Diameter	M8 x 1	M12 x 1	M18 x 1	M18 x 1
Power Supply	10-30VDC			
Maximum Switching Current	300mA			
Power Drain	<15mA			
Voltage Drop(Sensor ON)	<2.2V			
Short Circuit Protection	Yes			
Operating Frequency	1kHz			
Repeatability(%Sn)	<3%			
Hysteresis(%Sn)	<10%			
Case	Nickel-Plated Brass			
Flush Mounting	Yes	Yes	Yes	No
Protection Degree	IP 67			
Operating Temperature	-25 to +70°C			
Output Connection	Connector			

CONNECTOR

M12 Male Connector



1 = Brown (+10 to 30V)

2 = Not used

3 = Blue (GND)

4 = Black (OUTPUT)



+91-82200 07233, +91-9787979133



+91-82200 07233



sales@nanostartechnologies.com

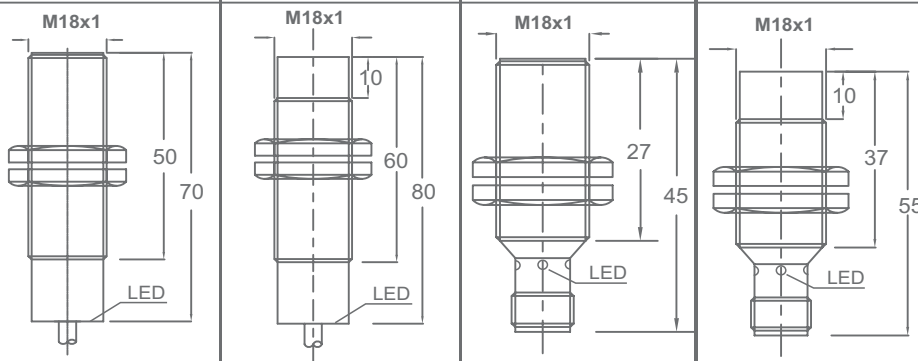
Inductive Proximity Sensor

Nanostar Technologies

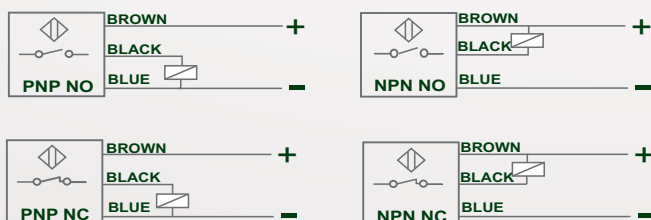


FEATURES

- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL					
	PNP,NO	NID18-5PO	NID18-8PO	NIDC1845-5PO	NIDC1855-8PO
	PNP,NC	NID18-5PC	NID18-8PC	NIDC1845-5PC	NIDC1855-8PC
	NPN,NO	NID18-5NO	NID18-8NO	NIDC1845-5NO	NIDC1855-8NO
	NPN,NC	NID18-5NC	NID18-8NC	NIDC1845-5NC	NIDC1855-8NC
Dimensions: mm					
Operating Distance(Sn)	5mm 8mm 5mm 8mm				
External Diameter	M18 x 1				
Power Supply	10-30VDC				
Maximum Switching Current	300mA				
Power Drain	<15mA				
Voltage Drop(Sensor ON)	<2.2V				
Short Circuit Protection	Yes				
Operating Frequency	1kHz				
Repeatability(%Sn)	<3%				
Hysteresis(%Sn)	<10%				
Case	Nickel-Plated Brass				
Flush Mounting	Yes	No	Yes	No	
Protection Degree	IP 67				
Operating Temperature	-25 to +70°C				
Output Connection	Cable PVC: L=2m			Connector	

CONNECTION DIAGRAM



CONNECTOR

M12 Male Connector



- 1 = Brown (+10 to 30V)
- 2 = Not used
- 3 = Blue (GND)
- 4 = Black (OUTPUT)



+91-82200 07233, +91-9787979133



+91-82200 07233



sales@nanostartechnologies.com

Inductive Proximity Sensor







Nanostar Technologies



FEATURES


- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL					
	PNP,NO	NID30-10PO	NID30-15PO	NIDC3070-10PO	NIDC3080-15PO
	PNP,NC	NID30-10PC	NID30-15PC	NIDC3070-10PC	NIDC3080-15PC
	NPN,NO	NID30-10NO	NID30-15NO	NIDC3070-10NO	NIDC3080-15NO
	NPN,NC	NID30-10NC	NID30-15NC	NIDC3070-10NC	NIDC3080-15NC
Dimensions: mm					
Operating Distance(Sn)		10mm	15mm	10mm	15mm
External Diameter		M30 x 1.5			
Power Supply		10-30VDC			
Maximum Switching Current		300mA			
Power Drain		<15mA			
Voltage Drop(Sensor ON)		<2.2V			
Short Circuit Protection		Yes			
Operating Frequency		1kHz			
Repeatability(%Sn)		<3%			
Hysteresis(%Sn)		<10%			
Case		Nickel-Plated Brass			
Flush Mounting		Yes	No	Yes	No
Protection Degree		IP 67			
Operating Temperature		-25 to +70°C			
Output Connection		Cable PVC: L=2m		Connector	

CONNECTION DIAGRAM




PNP NO



NPN NO



PNP NC



NPN NC

CONNECTOR

M12 Male Connector



1 = Brown (+10 to 30V)

2 = Not used

3 = Blue (GND)

4 = Black (OUTPUT)

Inductive Proximity Sensor



Nanostar Technologies



FEATURES

- ★ Protection degree IP67 : Dust tight and protection from effects of immersion
- ★ LED function indicator

MODEL			
	NO	NIA18-5PO	NIA18-8PO
	NC	NIA18-5PC	NIA18-8PC
Dimensions: mm			
Operating Distance(Sn)		5mm	8mm
External Diameter		M18 x 1	
Power Supply		90-250 VAC	
Maximum Switching Current		300mA	
Power Drain		<15mA	
Voltage Drop(Sensor ON)		<2.2V	
Short Circuit Protection		Yes	
Operating Frequency		25Hz	
Repeatability(%Sn)		<3%	
Hysteresis(%Sn)		<10%	
Case		Nickel-Plated Brass	
Flush Mounting	Yes		No
Protection Degree		IP 67	
Operating Temperature		-25 to +70°C	
Output Connection		Cable PVC: L=2m	Connector
CONNECTION DIAGRAM			



+91-82200 07233, +91-9787979133



+91-82200 07233



sales@nanostartechnologies.com

Inductive Proximity Sensor





Nanostar Technologies





FEATURES

- ★ Protection degree IP67 : dust tight and protection from effects of immersion
- ★ LED function indicator

MODEL			
	NO	NIA30-10PO	NIA30-15PO
	NC	NIA30-10PC	NIA30-15PC
Dimensions: mm			
Operating Distance(Sn)	10mm		15mm
External Diameter	M30 x 1.5		
Power Supply	90-250 Vac		
Maximum Switching Current	300mA		
Power Drain	<15mA		
Voltage Drop(Sensor ON)	<2.2V		
Short Circuit Protection	Yes		
Operating Frequency	25 Hz		
Repeatability(%Sn)	<3%		
Hysteresis(%Sn)	<10%		
Case	Nickel-Platted Brass		
Flush Mounting	Yes		No
Protection Degree	IP 67		
Operating Temperature	-25 to +70°C		
Output Connection	Cable PVC: L=2m		

CONNECTION DIAGRAM

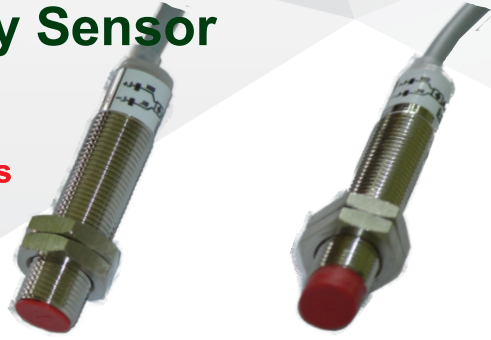




Inductive Proximity Sensor



Nanostar Technologies





FEATURES

- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL					
	NO	NID12-2DO	NID12-4DO	NIDC1255-2DO	NIDC1255-4DO
	NC	NID12-2DC	NID12-4DO	NIDC1255-2DO	NIDC1255-4DO
Dimensions: mm					
Operating Distance(Sn)		2mm	4mm	2mm	4mm
External Diameter	M12 x 1				
Power Supply	10-30VDC				
Maximum Switching Current	300mA				
Power Drain	<15mA				
Voltage Drop(Sensor ON)	<4.6V				
Short Circuit Protection	Yes				
Operating Frequency	1kHz				
Repeatability(%Sn)	<3%				
Hysteresis(%Sn)	<10%				
Case	Nickel-Plated Brass				
Flush Mounting	Yes	No	Yes	No	
Protection Degree	IP 67				
Operating Temperature	-25 to +70°C				
Output Connection	Cable PVC: L=2m			Connector	

CONNECTION DIAGRAM



CONNECTOR

M12 Male Connector



- 1 = Brown (+10 to 30V)
- 2 = not used
- 3 = not used
- 4 = Blue (GND)

Inductive Proximity Sensor



Nanostar Technologies





FEATURES

- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL					
Nanostar	NO	NID18-5DO	NID18-8DO	NIDC1845-5DO	NIDC1855-8DO
	NC	NID18-5DC	NID18-8DO	NIDC1845-5DO	NIDC1855-8DO
Dimensions: mm					
Operating Distance(Sn)		5mm	8mm	5mm	8mm
External Diameter	M18 x 1				
Power Supply	10-30VDC				
Maximum Switching Current	300mA				
Power Drain	<15mA				
Voltage Drop(Sensor ON)	<4.6V				
Short Circuit Protection	Yes				
Operating Frequency	1kHz				
Repeatability(%Sn)	<3%				
Hysteresis(%Sn)	<10%				
Case	Nickel-Plated Brass				
Flush mounting	Yes	No	Yes	No	No
Protection degree	IP 67				
Operating Temperature	-25 to +70°C				
Output Connection	Cable PVC: L=2m			Connector	

CONNECTION DIAGRAM



CONNECTOR

M12 Male Connector

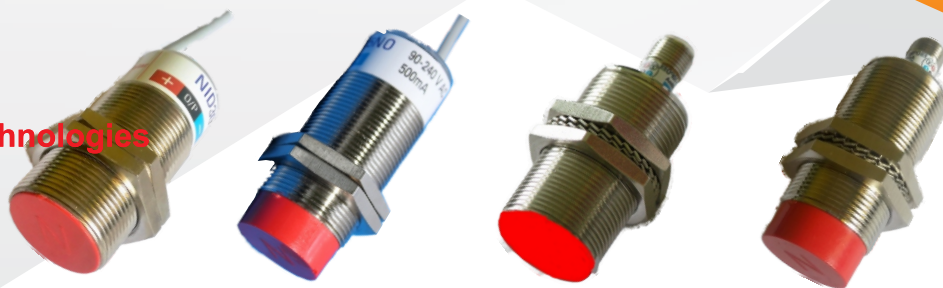


- 1 = Brown (+10 to 30V)
- 2 = not used
- 3 = not used
- 4 = Blue (GND)

Inductive Proximity Sensor







Nanostar Technologies





FEATURES

- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and Protection from effects of immersion
- ★ LED function indicator

MODEL					
	NO	NID30-10DO	NID30-15DO	NIDC3070-10DO	NIDC1880-8DO
	NC	NID30-10DC	NID30-15DO	NIDC3070-5DO	NIDC1880-8DO
Dimensions: mm					
					
Operating Distance(Sn)	10mm		15mm		15mm
External Diameter	M30 x 1.5				
Power Supply	10-30VDC				
Maximum Switching Current	300mA				
Power Drain	<15mA				
Voltage Drop(Sensor ON)	<4.6V				
Short Circuit Protection	Yes				
Operating Frequency	1kHz				
Repeatability(%Sn)	<3%				
Hysteresis(%Sn)	<10%				
Case	Nickel-Plated Brass				
Flush Mounting	Yes	No	Yes	No	
Protection dDgree	IP 67				
Operating Temperature	-25 to +70°C				
Output Connection	Cable PVC: L=2m			Connector	

CONNECTION DIAGRAM



CONNECTOR

M12 Male Connector



1 = Brown (+10 to 30V)
2 = not used
3 = not used
4 = Blue (GND)



+91-82200 07233, +91-9787979133



+91-82200 07233



sales@nanostartechnologies.com



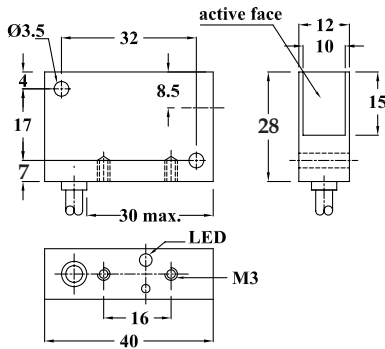
Nanostar Technologies

Inductive Proximity Sensor







FEATURES

- ★ Short Circuit & Reverse polarity protection
- ★ Protection degree IP67 : Dust tight and protection from effects of immersion
- ★ LED function indicator

	PNP,NO	MODEL
	PNP,NC	NIDB40-4PO
	NPN,NO	NIDB40-4PC
	NPN,NC	NIDB40-4NO
NIDB40-4NC		
Dimentions: mm		
Operating Distance(Sn)		4mm
Power Supply		10-30VDC
Maximum Switching Current		400mA
Power Drain		<15mA
Voltage Drop(Sensor ON)		<2.2V
Short Circuit Protection		Yes
Operating Frequency		1kHz
Repeatability(%Sn)		<3%
Hysteresis(%Sn)		<10%
Case		Nickel-Plated Brass
Protection Degree		IP 67
Operating Temperature		-25 to +70°C
Output Connection		Cable PVC: L=2m

CONNECTION DIAGRAM







+91-82200 07233, +91-9787979133



+91-82200 07233



sales@nanostartechnologies.com