


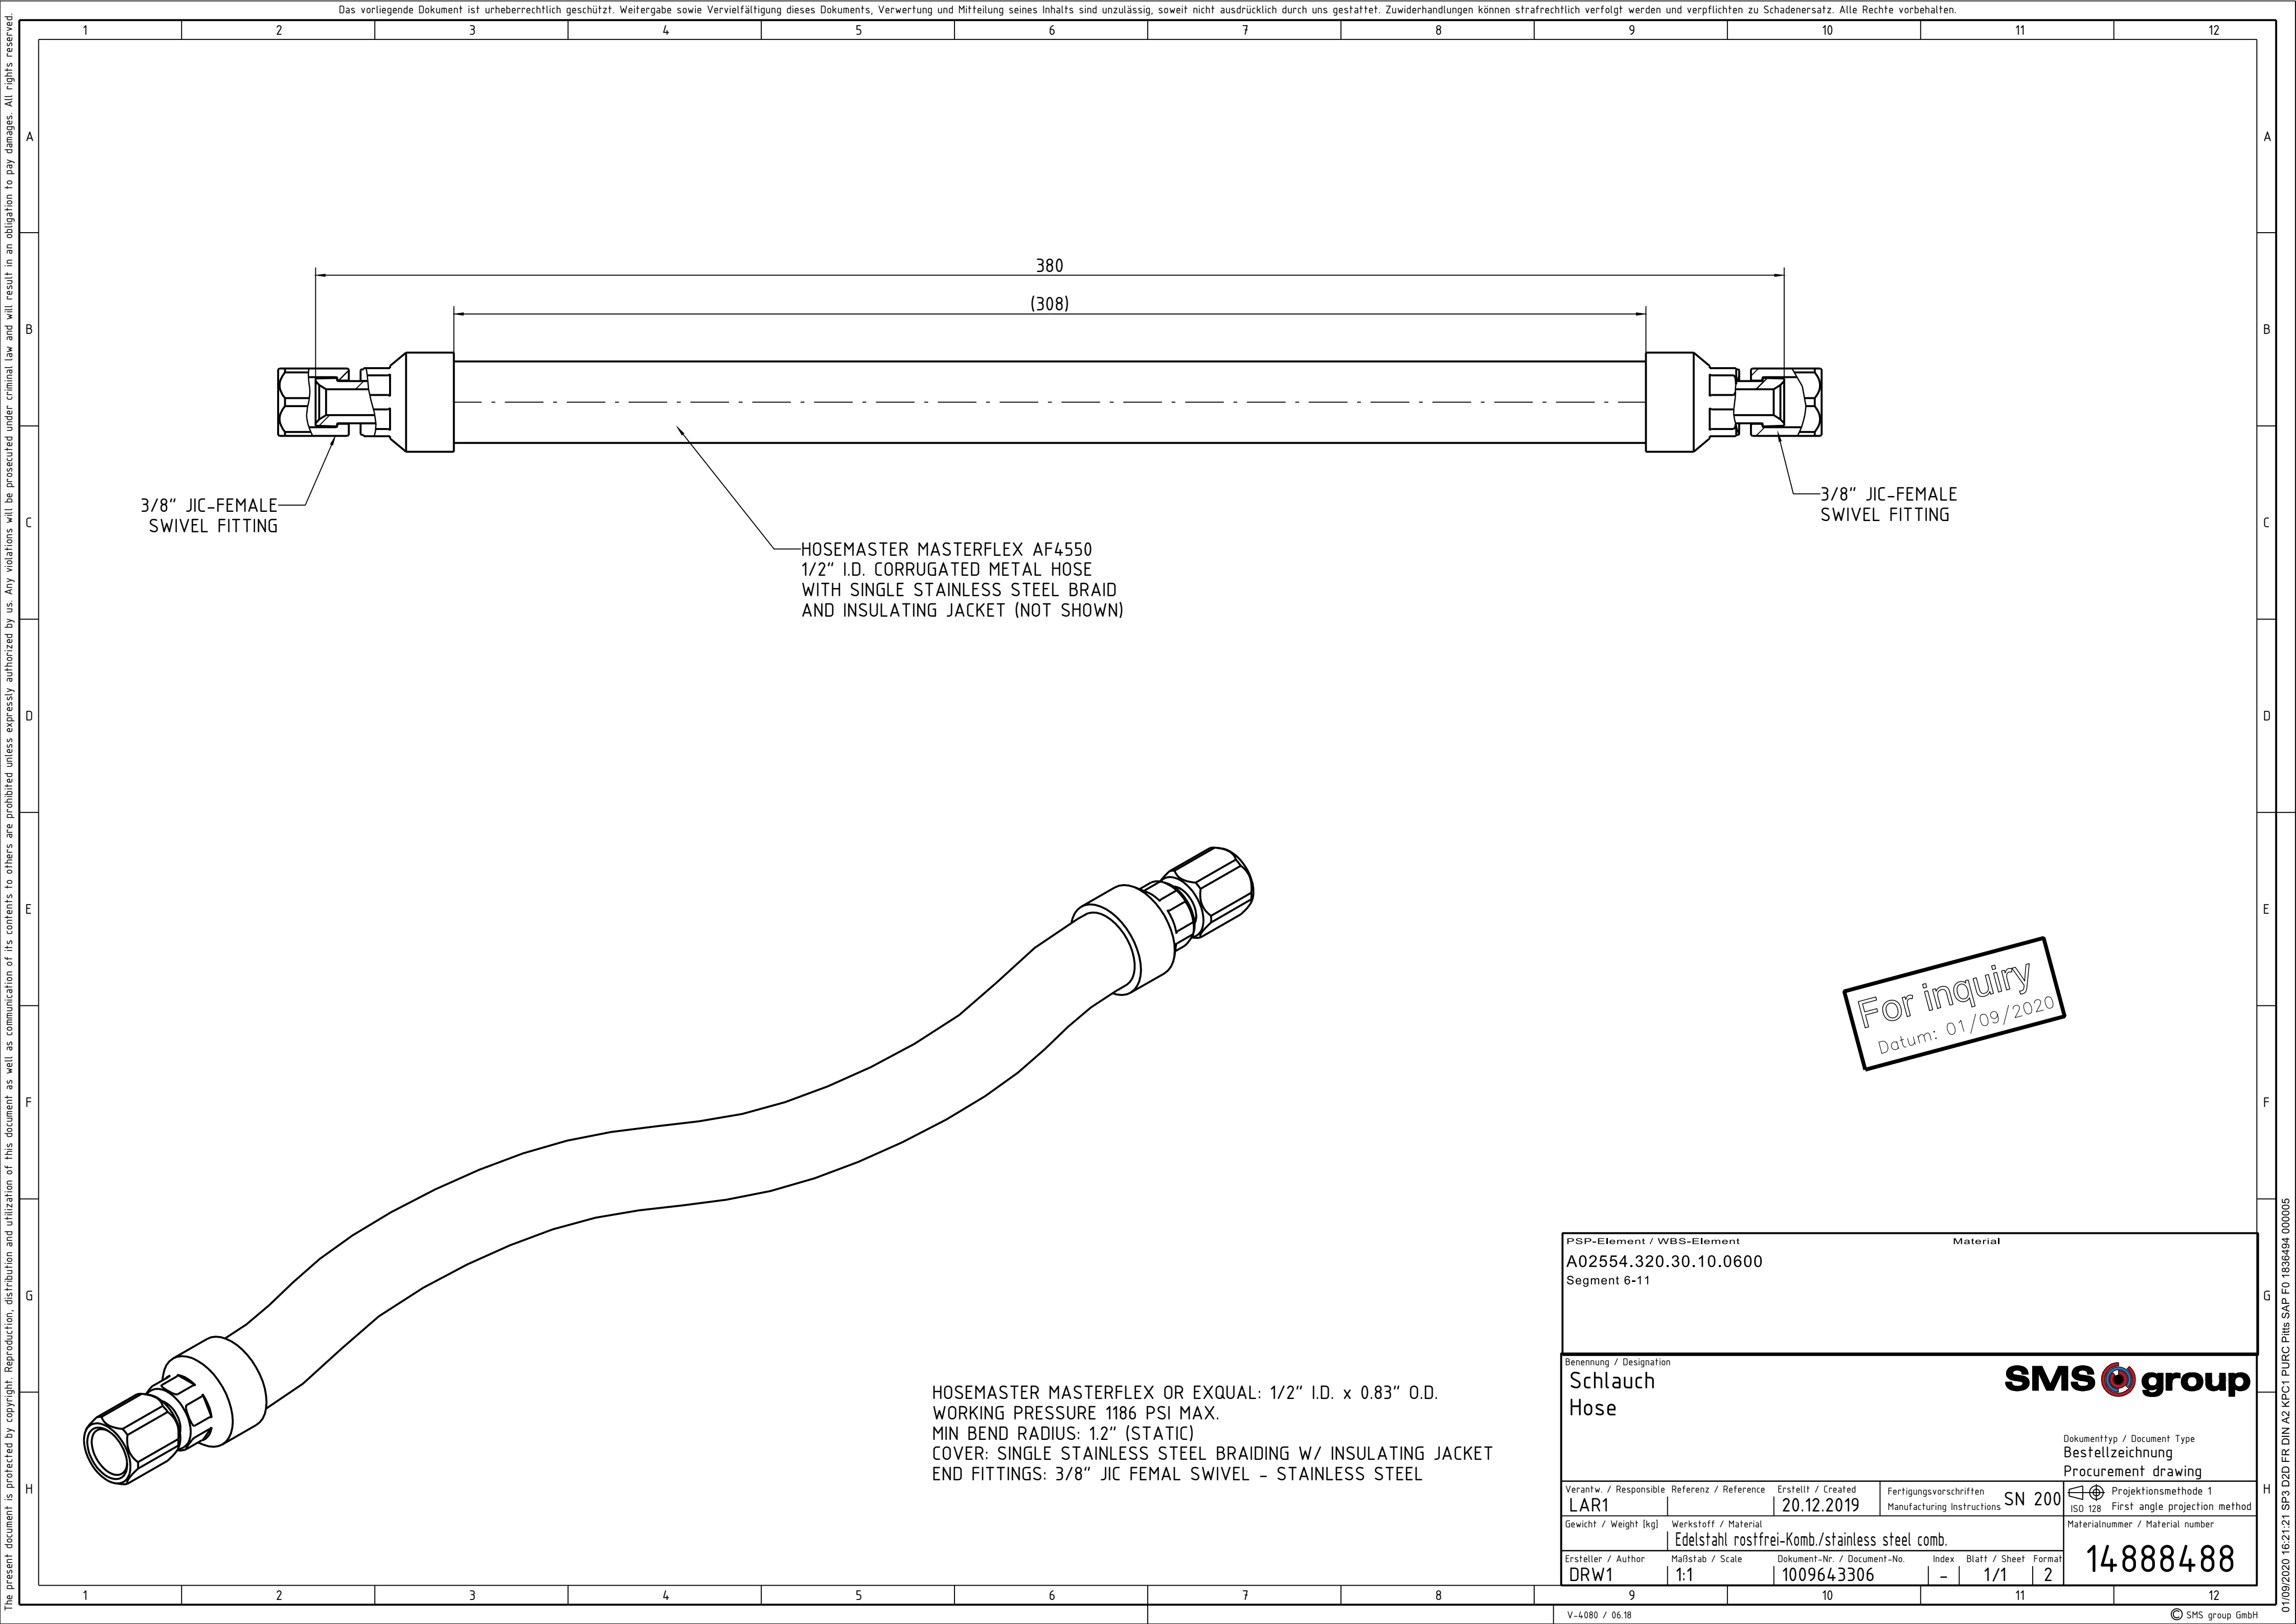

3/8" JIC-FEMALE
SWIVEL FITTING

HOSEMASTER MASTERFLEX AF4550
1/2" I.D. CORRUGATED METAL HOSE
WITH SINGLE STAINLESS STEEL BRAID
AND INSULATING JACKET (NOT SHOWN)

3/8" JIC-FEMALE
SWIVEL FITTING

HOSEMASTER MASTERFLEX OR EXQUAL: 1/2" I.D. x 0.83" O.D.
WORKING PRESSURE 1186 PSI MAX.
MIN BEND RADIUS: 1.2" (STATIC)
COVER: SINGLE STAINLESS STEEL BRAIDING W/ INSULATING JACKET
END FITTINGS: 3/8" JIC FEMAL SWIVEL - STAINLESS STEEL

For inquiry
Datum: 01/09/2020

PSP-Element / WBS-Element				Material			
A02554.320.30.10.0600							
Segment 6-11							
Benennung / Designation				SMS  group			
Schlauch Hose							
				Dokumenttyp / Document Type Bestellzeichnung Procurement drawing			
Verantw. / Responsible	Referenz / Reference	Erstellt / Created	Fertigungsvorschriften	SN 200		Projektionsmethode 1	
LAR1		20.12.2019	Manufacturing Instructions		ISO 128	First angle projection method	
Gewicht / Weight [kg]	Werkstoff / Material				Materialnummer / Material number		
	Edelstahl rostfrei-Komb./stainless steel comb.				14888488		
Ersteller / Author	Maßstab / Scale	Dokument-Nr. / Document-No.	Index	Blatt / Sheet	Format		
DRW1	1:1	1009643306	-	1/1	2		