




MW-M & MG-M Series Female Rod Ends - Metric

General Purpose - Precision

M
E
T
R
I
C

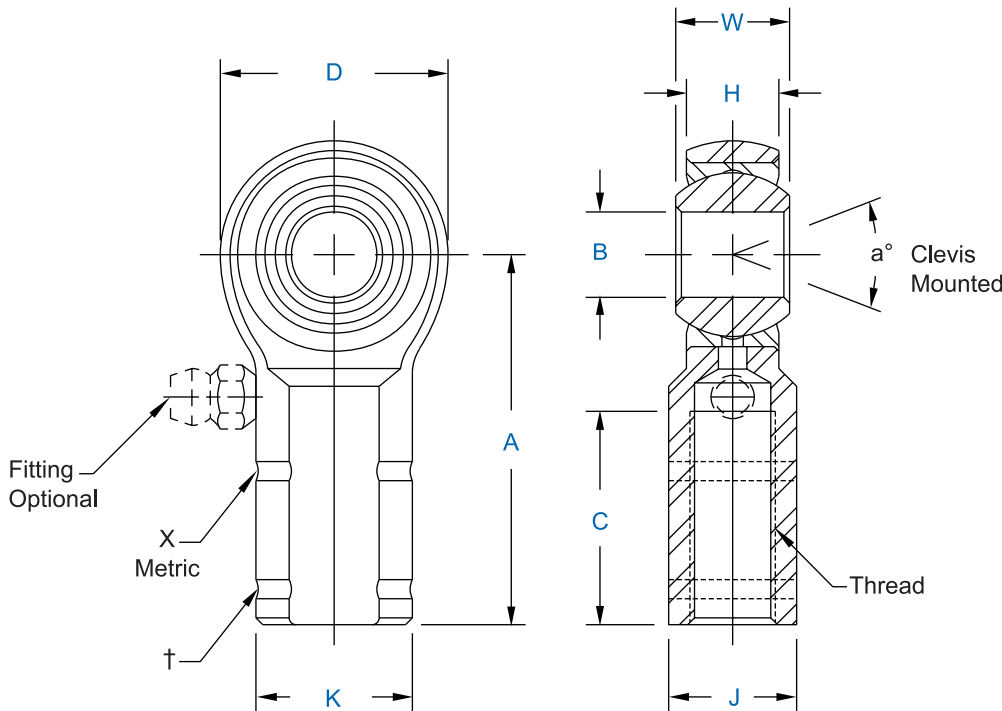

Specifications	
Body - Carbon steel, protective coated for corrosion resistance.	
Race - Carbon steel, protective coated for corrosion resistance.	
Ball - Alloy steel, heat treated, hard chrome plated.	

Rod End No.		DIMENSIONS IN MILLIMETERS										a° Misalign. Angle**			Ultimate Radial Static Load Capacity Newtons	Approx. Brg. Wt. Grams
Right Hand	Left Hand†	B +0.065 - .013	W ± .13	H ± .13	A ± .40	D ± .38	K ± .25	J ± .25	Ball Dia. Ref.	C ± 1.00	Thread	a ₁	a ₃	a ₄		
* ±MW-M3	±MG-M3	3	6	4.75	21	12.50	8	7	7.93	10	M3 X 0.5	13	25	62	4,972	10
MW-M5	MG-M5	5	8	6.25	27	16.00	11	9	11.10	14	M5 X 0.8	14	24	58	7,090	17
MW-M6	MG-M6	6	9	7.00	30	19.00	13	11	12.70	14	M6 X 1.0	13	23	57	10,573	25
MWF-M8	MGF-M8	8	12	8.75	36	22.25	16	14	15.88	17	M8 X 1.0	18	31	53	14,072	40
MW-M8	MG-M8										M8 X 1.25					
MWF-M10	MGF-M10	10	14	10.50	43	27.00	19	17	19.05	21	M10 X 1.25	17	28	50	20,603	80
MW-M10	MG-M10										M10 X 1.5					
MWF-M12	MGF-M12	12	16	12.00	50	30.00	22	19	22.23	24	M12 X 1.25	17	27	49	18,215	95
MW-M12	MG-M12										M12 X 1.75					
MWF-M14	MGF-M14	14	19	13.50	57	34.75	25	22	25.40	27	M14 X 1.5	21	33	49	29,840	160
MW-M14	MG-M14										M14 X 2.0					
MWF-M16	MGF-M16	16	21	14.25	64	38.00	27	22	28.58	33	M16 X 1.5	23	35	52	32,223	215
MW-M16	MG-M16										M16 X 2.0					
* MW-M18	MG-M18	18	23	16.25	71	42.00	31	27	31.75	36	M18 X 1.5	21	31	49	41,303	300
MWF-M20	MGF-M20	20	25	18.00	77	46.00	34	30	34.93	40	M20 X 1.5	20	29	48	50,952	350
* MW-M20	MG-M20										M20 X 2.5					
* MW-M22	MG-M22	22	28	19.50	86	50.00	37	32	38.10	43	M22 X 1.5	22	33	48	56,238	390
* MW-M25	MG-M25	25	31	22.00	95	60.00	42	36	42.86	48	M24 X 2.0	19	31	47	104,435	700
* MW-M30	MG-M30	30	37	25.40	104.75	70.00	41.25	38.10	50.80	54	M30 X 2.0	21	33	47	147,238	970

*Check for availability.

** See page 4.

X Designates metric threads.

†Left hand units have identification groove.

‡ Grease fitting not available on this size. Units are supplied without grease fittings. When a grease fitting is required, specify by adding suffix as designated.

Z Zerk type fitting Ex: MW-M10Z

F Flush type fitting Ex: MW-M10F