


Ariaform® / TPU

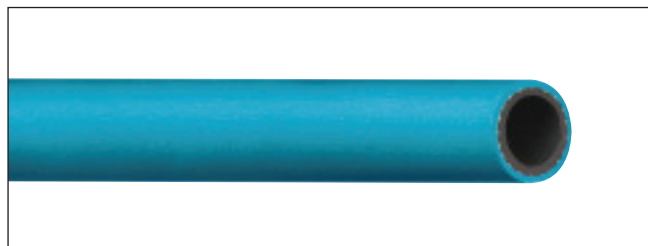

Polyurethane airpressure hose

For pneumatic tools. Excellent resistant against oil, fuel, fat acids and lye's. Polyester reinforced for handling pressure, lightweight and very abrasive resistant.

Working pressure : 20 bar (at 20°C)
 Burst pressure : 60 bar (at 20°C)
 Temperature range : -20°C / +60°C
 Tube : Polyurethane, black smooth
 Cover : Polyurethane, blue smooth

Marking:  ARIAFORM / TPU - DIAMETER - PN 20 BAR

ø Inner mm	Wall mm	ø Outer mm	kg/mtr	Length mtr	Art.-No.
6	2	10	0,070	50	4220 006000
8	2	12	0,085	50	4220 008000
9	2	13	0,100	50	4220 009000
10	2,25	14,5	0,115	50	4220 010000
13	2,5	18	0,165	50	4220 013000

Niplaflex®



Multi-purposehose

for use with: Water, air, oil, petrol, grease, chemicals, pesticides a.o. Ageing- and ozoneresistant, non staining.

Working pressure : 25 bar
 Burst pressure : 75 bar
 Temperature range : -20°C / +70°C
 Tube : NBR/PVC, black, smooth seamless
 Cover : NBR/PVC, black, smooth seamless

Marking:  NIPLAFLEX® PN 25 BAR

ø Inner mm	Wall mm	ø Outer mm	kg/mtr	Length mtr	Art.-No.
6	3	12	0,110	100	3240 006000
8	3,5	15	0,170	100	3240 008000
9	3,5	16	0,185	100	3240 009000
10	3,5	17	0,200	100	3240 010000
13	4	21	0,280	100	3240 013000
19	4,5	28	0,440	50	3240 019000

Cutted length possible

Solvoform



Compressor-airhose

Grease- and oil mist resistant, for use in garages, workshops.

Burst pressure : 60 bar
 Temperature range : -30°C / +80°C
 Tube : NBR, black, smooth
 electrical resistance < 10⁹ Ω
 Cover : NBR/PVC, grey, smooth

Marking:  SOLVOFORM

ø Inner mm	Wall mm	ø Outer mm	PN/bar at 20°C	Length mtr	Art.-No.
6	4	14	20	50	3210 006000
8	3,5	15	20	50	3210 008000
10	3,5	17	20	50	3210 010000
13	4,5	22	20	50	3210 013000
19	4,5	28	20	50	3210 019000